

# Joint, Calcaneal and Small Bone Distractors

Two hole sizes and two arm designs allow for easier pin size selection and helps with distraction in a variety of indications

## No Thumbscrews

PRODUCT NO'S:	
<b>OUTSPREAD ARMS</b>	
4210-LB [Large]	Holes Diameters: For .062" & .094" (1,6 & 2,5 mm) K-wire Pins Overall Length: 8" (20,3 cm)
4210-SB [Small]	Holes Diameters: For .062" & .094" (1,6 & 2,5 mm) K-wire Pins Overall Length: 6" (15,2 cm)
<b>CLOSED ARMS</b>	
4210-LS [Large]	Holes Diameters: For .062" & .094" (1,6 & 2,5 mm) K-wire Pins Overall Length: 8" (20,3 cm)
4210-SS [Small]	Holes Diameters: For .062" & .094" (1,6 & 2,5 mm) K-wire Pins Overall Length: 6" (15,2 cm)
4210-XSD [Extra Small]	Holes Diameters: For .062" & .094" (1,6 & 2,5 mm) K-wire Pins Overall Length: 4.25" (10,8 cm)

**PROUDLY**  
MADE  
IN THE  
**USA**



## With Thumbscrews

Thumbscrews help prevent the unit from sliding on the pins

PRODUCT NO'S:	
<b>OUTSPREAD ARMS</b>	
4215-LB [Large]	Holes Diameters: For .062" & .094" (1,6 & 2,5 mm) K-wire Pins Overall Length: 8" (20,3 cm)
4215-SB [Small]	Holes Diameters: For .062" & .094" (1,6 & 2,5 mm) K-wire Pins Overall Length: 6" (15,2 cm)
<b>CLOSED ARMS</b>	
4215-LS [Large]	Holes Diameters: For .062" & .094" (1,6 & 2,5 mm) K-wire Pins Overall Length: 8" (20,3 cm)
4215-SS [Small]	Holes Diameters: For .062" & .094" (1,6 & 2,5 mm) K-wire Pins Overall Length: 6" (15,2 cm)

Thumbscrew Modification Designed by Kelly McCormick, MD

**PROUDLY**  
MADE  
IN THE  
**USA**

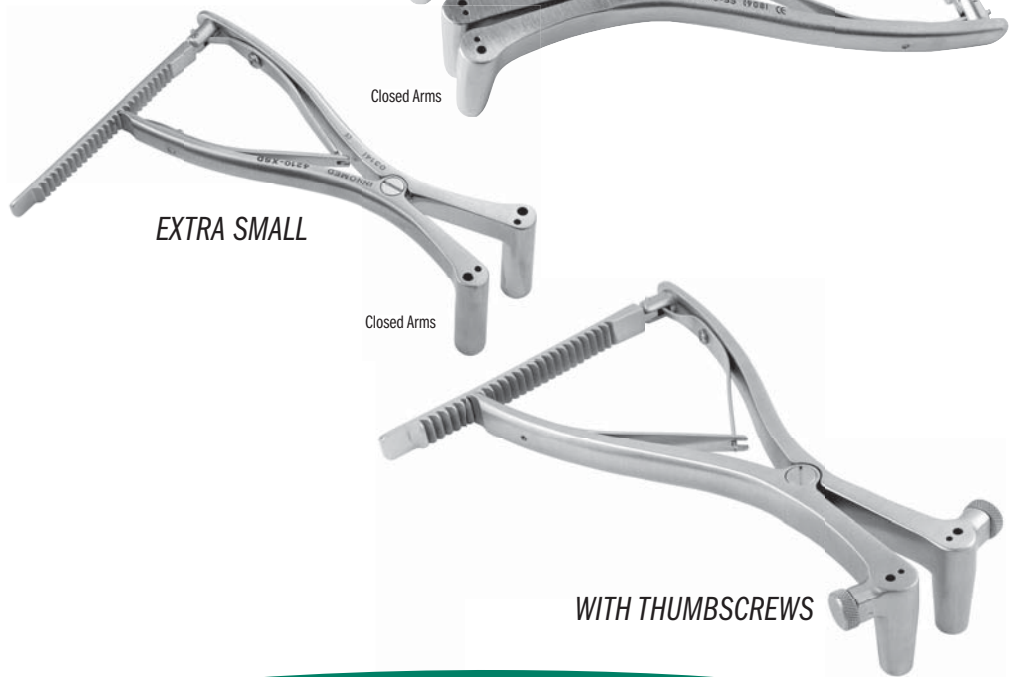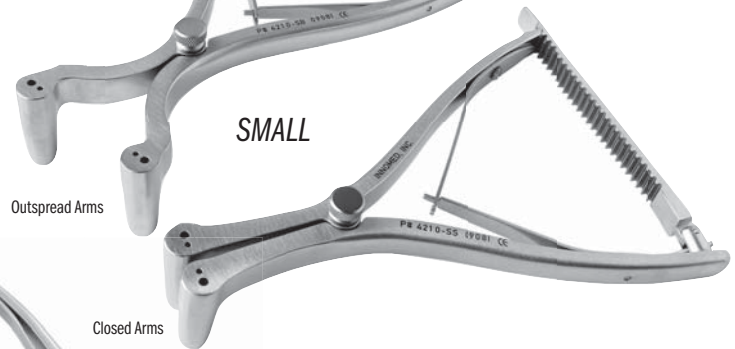

ISO 9001:2008 • ISO 13485:2003

FREE TRIAL ON MOST INSTRUMENTS

Scan to  
Launch Our  
Website



**INNOMED**



103 Estus Drive, Savannah, GA 31404  
www.innomed.net info@innomed.net

912.236.0000 Phone  
912.236.7766 Fax

Innomed-Europe Tel. +41 41 740 67 74  
Fax +41 41 740 67 71

1.800.548.2362