



# Stanton Needle Driver


Designed by John L. Stanton, MD, FACS

*Allows a heavy cutting needle such as an OS-6 to be pushed through cancellous bone when re-attaching muscle or tendon*

The groove captures the outer (convex) side of the needle and prevents the needle from spinning even when applying significant pressure. Useful for reattaching the rotator cuff in rotator cuff repairs, as well as in attaching suture anchors.

**PRODUCT NO:**  
3042  
Overall Length: 6.75 (17.1 cm)  
Jaw Width: .25" (6.3 mm)

**PROUDLY  
MADE  
IN THE  
USA**

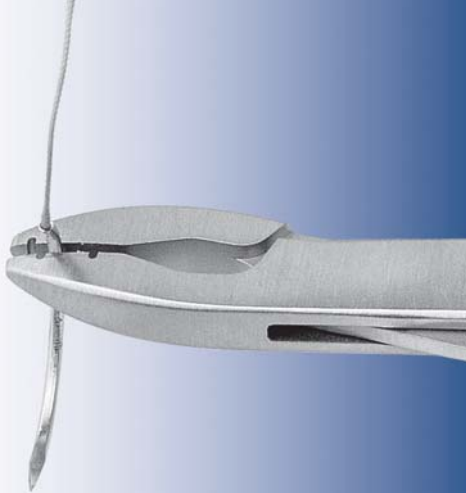

ISO 9001:2008 • ISO 13485:2003

**FREE TRIAL ON MOST INSTRUMENTS**

Scan to  
Launch Our  
Website



103 Estus Drive, Savannah, GA 31404  
www.innomed.net info@innomed.net

912.236.0000 Phone  
912.236.7766 Fax

**Innomed-Europe** Tel. +41 41 740 67 74  
Fax +41 41 740 67 71

**INNOMED**

**1.800.548.2362**